

# Inspectorate Española, S.A.

(Unipersonal)


Laboratorio de análisis - Huelva

Polígono Industrial Nueva Puerto S/N,

Palos de la Frontera (HUELVA)

Tel.: 959 369 335 E-Mail: huelva.lab@inspectorate.es

C.I.F. : A 28633600



## ANALYTICAL REPORT

Job No: 17896-1

o/Ref: ESONVJ18005763

Y/Ref:

Date of reception: 22/11/2018

Date Analysis started: 22/11/2018

Date Analysis completed: 22/11/2018

Grade: GASOIL A

Origin: Terminales Canarias Tenerife

Label: Terminales Canarias Tenerife

Id: HISTRIA GIADA

SHORE TANK 101 AFTER DISCHARGE - T0818101

Sample Package: 1x1L can

Sampling date: 18/11/2018

Seal N°: #56874

Test	Units	Method	Results	Specifications <sup>1</sup>	U=R/√2	Notes*
Density at 15°C	Kg/m <sup>3</sup>	ASTM D-4052-16	835,1	820-845	±0,4	
Sulphur*	mg/Kg	EN-ISO-20846:2011	10,0	10,0 max		
Distillation*						
65% recovered	°C	ASTM D-86-17	291,2	250 min		
85% recovered	°C	ASTM D-86-17	327,0	350 max		
95% recovered	°C	ASTM D-86-17	358,1	360 max		
Kinematic Viscosity at 40°C*	mm <sup>2</sup> /s	ASTM D-445-17	2,415	2,00-4,50		
Flash Point*	°C	ASTM D-93 A-16	58,0	55,0 min		
Water content*	mg/Kg	EN ISO 12937:2001	90	200 max		
Copper corrosion, 3h 50°C*	Class 1	ASTM D-130-12	1a	class 1		
Electrical conductivity*	pS/m	ASTM D-2624-09	62	-		
Temperature*	°C		22			
Fame Content*	%vol	EN 14078:2010	6,3	7,0 max		
C.F.P.P	°C	EN 116:2015	-16	0 max	±3	

The test results shown on this report affect only to the samples received in this laboratory, and not necessarily to the whole from which these samples were drawn.

Precision parameters apply in the evaluation of the test results specified above. Please also refer to ASTM D3244 (Except for RFG), IP 367 and appendix E of IP standard methods for analysis and testing in respect to the utilization of test data to determine conformance with the specifications.

The samples will be kept for a period of three months.

<sup>1</sup> Specifications: GASOLEO AUTOMOCION SGC/SGA/SGP OPS REVISION 7 Fecha 28/04/15

Tests marked with (\*) are not included in the scope of the accreditation. Estimated uncertainties for each method are available upon request.


Date of Report

26/11/2018

Name/s

Marcos Carabias

Signature/s

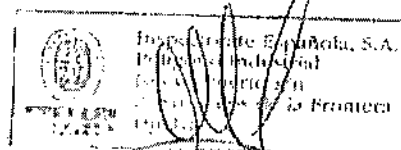

# Inspectorate Española, S.A.

(Unipersonal)

Laboratorio de análisis - Huelva

Polígono Industrial Nuevo Puerto S/H.

Palos de la Frontera (HUELVA)

Tel.: 959 369 335 E-Mail: huelva.lab@inspector.es

C.I.F. : A 28633600



## ANALYTICAL REPORT

Job No: 18036-1

o/Ref: ESODCJ18006374

Y/Ref:

Date of reception: 18/12/2018

Date Analysis started: 18/12/2018

Date Analysis completed: 19/12/2018

Grade: GASOIL A

Origin: Terminales Canarias Tenerife

Label: Terminales Canarias Tenerife

Id: MARVEA

SHORE TANK 101 AFTER DISCHARGE - T0918101

Sample Package: 1x1L can

Sampling date: 10/12/2018

Seal N°: #56911

Test	Units	Method	Results	Specifications <sup>1</sup>	U=R/v2	Notes*
Density at 15°C	Kg/m <sup>3</sup>	ASTM D-4052-18	836,8	820-845	±0,4	
Sulphur*	mg/Kg	EN-ISO-20846:2011	10,0	10,0 max		
Disillation*						
65% recovered	°C	ASTM D-86-17	292,6	250 min		
85%recovered	°C	ASTM D-86-17	326,0	350 max		
95% recovered	°C	ASTM D-86-17	354,5	360 max		
Kinematic Viscosity at 40°C*	mm2/s	ASTM D-445-17	2,441	2,00-4,50		
Flash Point*	°C	ASTM D-93 A-16	56,0	55,0 min		
Water content*	mg/Kg	EN ISO 12937:2001	80	200 max		
Copper corrosion, 3h 50°C*	Class 1	ASTM D-130-12	1a	class 1		
Electrical conductivity*	pS/m	ASTM D-2624-09	56	-		
Temperature*	°C		22			
Fame Conteni*	%vol	EN 14078:2010	6,6	7,0 max		
C.F.P.P	°C	EN 116:2015	-15	-10 max	±3	

The test results shown on this report affect only to the samples received in this laboratory, and not necessarily to the whole from which these samples were drawn.

Precision parameters apply in the evaluation of the test results specified above. Please also refer to ASTM D3244 (Except for RFG), IP 367 and appendix E of IP standard methods for analysis and testing in respect to the utilization of test data to determine conformance with the specifications.

The samples will be kept for a period of three months.

<sup>1</sup> Specifications: GASOLEO AUTOMOCION SGC/SGA/SGP OPS REVISION 7 Fecha 28/04/15

Tests marked with (\*) are not included in the scope of the accreditation. Estimated uncertainties for each method are available upon request.


Date of Report

19/12/2018

Name/s

José Manuel Pérez

Signature/s

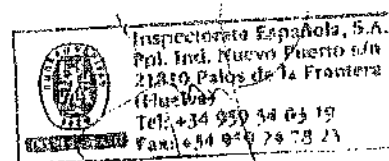



Algeciras Laboratory  
Pol. Ind. Las Marismas III, C/ Océano Pacífico S/N  
Telephone: +34 956 92 42 75 E-mail: alg.lab@amspecgroup.com  
CIF: B72083769

### ANALYTICAL REPORT - Revision 1

Job Number: 894  
O/ Ref: SP1812-003  
Y/ Ref: T0918101 - B/T MARVEA  
Grade: GASOIL A  
Origin: TERMINALES CANARIAS, TENERIFE  
Label: AMSPEC  
Identification: SHORE TANK 101  
Description: SHORE TANK COMPOSITE

Date of reception: 19th/12/2018  
Date Analysis started: 19th/12/2018  
Date Analysis completed: 20th/12/2018  
Sample Package: 3 X 1L PLASTIC BOTTLE  
Sampling date: 11/12/18  
Seal N°: N/A

Parameter	Units	Method	Result	Limit	Note
Density at 15°C	g/ml	ISO 12185:1996/Cor.1:2001(E)	0,8366		
Viscosity at 40°C	mm <sup>2</sup> /s	ISO 3104:1994/Cor.1:1997(E)	2,417		
Sulphur content	mg/Kg	ISO 20846:2011	5,6		
Distillation	°C	ASTM D86 - 16a			
65% Recovered			293,1		
85% Recovered			327,0		
95% Recovered			354,3		
Flash point (Proced. A - Electric ignitor)	°C	ISO 2719:2002(E)	55,5		(I)
Water Karl Fischer	mg/Kg	ISO 12937:2000(E)	46		
Copper corrosion, 3h 50°C	Class 1	ASTM D130 - 12	1a		
Conductivity at 20°C	ps/m	ASTM D2624 - 15	45		(II)
FAME content	%vol	EN 14078:2010	6,6		
CFPP	°C	UNE-EN 116:2015	-17		

(I) 102,6 Kpa; Absolute Barometric Pressure.  
(II) Test performed at 20°C

The test results shown on this report affect only to the samples received in this laboratory, and not necessarily to the whole from which these samples were drawn.  
Precision parameters apply in the evaluation of the test results specified above. Please also refer to ASTM D3244 (Except for RFG), IP 367 and appendix E of IP standard methods for analysis and testing in respect to the utilization of test data to determine conformance with the specifications.  
The samples will be kept for a period of three months.  
\*This Analytical Report 894 - Revision 1, cancel and replace the analytical report 894.\*

Date of Report: 20/12/2018  
Name/s: Alvaro Bassi  
Signature/s: Chief Analyst

AmSpec Iberia S.L.  
C/ Océano Pacífico  
Punto Industrial Las Marismas  
11379 Las Marismas (Cádiz, Spain)

**Inspectorate Española, S.A.**  
(Unipersonal)

Laboratorio de análisis - Huelva  
Polígono Industrial Nuevo Puerto S/N.  
Palos de la Frontera (HUELVA)  
Tel : 959 369 335 E-Mail : huelva.lab@inspectorate.es  
C.I.F. : A 28433600



**ANALYTICAL REPORT**

Job No: 18036-2	Date of reception: 18/12/2018
o/Ref: ESODCJ18006374	Date Analysis started: 18/12/2018
Y/Ref:	Date Analysis completed: 19/12/2018


Grade: GASOIL A	Sample Package: 1x1L can
Origin: Terminales Canarias Tenerife	Sampling date: 11/12/2018
Label: Terminales Canarias Tenerife	Seal N°: #56981
Id: MARVEA	
SHORE TANK 102 AFTER DISCHARGE - T1118102	

Test	Units	Method	Results	Specifications <sup>1</sup>	U=R/√2	Notes*
Density at 15°C	Kg/m <sup>3</sup>	ASTM D-4052-18	838,4	820-845		±0,4
Sulphur*	mg/Kg	EN-ISO-20846:2011	8,8	10,0 max		
Distillation*						
65% recovered	°C	ASTM D-86-17	294,2	250 min		
85% recovered	°C	ASTM D-86-17	324,8	350 max		
95% recovered	°C	ASTM D-86-17	349,9	360 max		
Kinematic Viscosity at 40°C*	mm <sup>2</sup> /s	ASTM D-445-17	2,494	2,00-4,50		
Flash Point*	°C	ASTM D-93 A-16	57,0	55,0 min		
Water content*	mg/Kg	EN ISO 12937:2001	90	200 max		
Copper corrosion, 3h 50°C*	Class 1	ASTM D-130-12	1a	class 1		
Electrical conductivity*	pS/m	ASTM D-2624-09	30	-		
Temperature*	°C		22			
Fame Content*	%vol	EN 14078:2010	6,7	7,0 max		
C.F.P.P	°C	EN 116:2015	-14	-10 max		±3

The test results shown on this report affect only to the samples received in this laboratory, and not necessarily to the whole from which these samples were drawn.  
Precision parameters apply in the evaluation of the test results specified above. Please also refer to ASTM D3244 (Except for RFG), IP 367 and appendix E of IP standard methods for analysis and testing in respect to the utilization of test data to determine conformance with the specifications.  
The samples will be kept for a period of three months.

<sup>1</sup> Specifications: GASOLEO AUTOMOCION SGC/SGA/SGP OPS REVISION 7 Fecha 28/04/15  
Tests marked with (\*) are not included in the scope of the accreditation. Estimated uncertainties for each method are available upon request.

Date of Report 19/12/2018  
Name/s José Manuel Pérez  
Signature/s

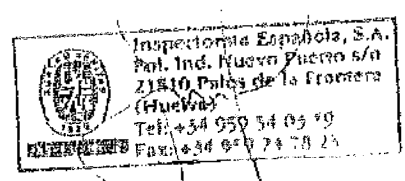

**Inspectorate Española, S.A.**  
(Unipersonal)

Laboratorio de análisis - Huelva  
Polígono Industrial El Nuevo Puerto 111  
Pueblo de la Frontera (HUELVA)  
Tel.: 959 369 235 E-Mail: huelva.la@inspectorate.es  
C.I.F. : A 29.036.641



**ANALYTICAL REPORT**

Job No: 17736-2  
o/Ref: ESOOCJ18005383  
Y/Ref:

Date of reception: 26/10/2018  
Date Analysis started: 26/10/2018  
Date Analysis completed: 26/10/2018

Grade: Gasoline 95  
Origin: Terminales Canarias Tenerife  
Label: Terminales Canarias Tenerife  
Id: CPO GERMANY

Sample Package: 1x1L can  
Sampling date: 23/10/2018  
Seal N°: #56817

SHORE TANK 211 AFTER DISCHARGE - T1118211

Test	Units	Method	Results	Specifications <sup>1</sup>	U=R/v2	Notes <sup>4</sup>
Density at 15 °C	Kg/m3	ASTM D-4052-2018	744,5	720-775	±1,6	
DVPE <sup>2</sup>	KPa	EN ISO 13016-1:2008	56,4	50-80		
Distillation <sup>3</sup>						
Evap at 70°C	%vol	ASTM D-86-17	35,5	22-56		
Evap at 100°C	%vol	ASTM D-86-17	59,5	46-74		
Evap at 150°C	%vol	ASTM D-86-17	95,2	min 75		
FBP	°C	ASTM D-86-17	109,2	max 210		
Residue	%vol	ASTM D-86-17	1,0	max 2,0		
Sulphur <sup>2</sup>	mg/Kg	EN-ISO-20846:2011	5,4	max 10,0		
Lead content <sup>2</sup>	g/L	ASTM D-3237-12	<0,0025	max 0,005		
Copper Corrosion 3H 50 °C <sup>2</sup>		ASTM D-130-12	1a	Class 1		
Existent Gums (washed) <sup>2</sup>	mg/100ml	ASTM D-381-04	<1	max 5		
Total contamination <sup>2</sup>	mg/Kg	EN ISO 12662:2014	<6	-		

The test results shown on this report affect only to the samples received in this laboratory, and not necessarily to the whole from which these samples were drawn.

Precision parameters apply in the evaluation of the test results specified above. Please also refer to ASTM D3244 (Except for RFG), IP 367 and appendix E of IP standard methods for analysis and testing in respect to the utilization of test data to determine conformance with the specifications.

The samples will be kept for a period of three months.

<sup>1</sup> Specifications: GASOLINAS SGC/SGA/SGP OPS REVISION 7 Fecha 28/04/15

Tesis marked with (\*) are not included in the scope of the accreditation. Estimated uncertainties for each method are available upon request.



Date of Report: 26/10/2018  
Name/s: Isidro López  
Signature/s:

Chief Analyst

**Inspectorate Española, S.A.**  
(Unipersonal)

Laboratorio de análisis - Huelva  
Polígono Industrial Nuevo Puerto S/N  
Polos de la Frontera (HUELVA)  
Tel.: 959 369 335 E-Mail: hual@ihb.inspectorate.es  
C.I.F.: A 22633699



**ANALYTICAL REPORT**

Job No: 18036-3  
o/Ref: ESODCJ18006374  
Y/Ref:

Date of reception: 18/12/2018  
Date Analysis started: 18/12/2018  
Date Analysis completed: 19/12/2018

Grade: Gasoline 95  
Origin: Terminales Canarias Tenerife  
Label: Terminales Canarias Tenerife  
Id: MARVEA  
SHORE TANK 212 AFTER DISCHARGE - T1218212

Sample Package: 1x1L can  
Sampling date: 10/11/2018  
Seal N°: #56939

Test	Units	Method	Results	Specifications <sup>1</sup>	U=R/v2	Notes**
Density at 15 °C	Kg/m3	ASTM D-4052-2018	724,3	720-775		±2.0
DVPE*	KPa	EN ISO 13016-1:2008	63,3	50-80		
Distillation*						
Evap at 70°C	%vol	ASTM D-86-17	35,3	22-56		
Evap at 100°C	%vol	ASTM D-86-17	66,6	46-74		
Evap at 150°C	%vol	ASTM D-86-17	95,5	min 75		
FBP	°C	ASTM D-86-17	173,8	max 210		
Residue	%vol	ASTM D-86-17	1,0	max 2,0		
Sulphur*	mg/Kg	EN-ISO-20846:2011	9,3	max 10,0		
Lead content*	g/L	ASTM D-3237-12	<0,0025	max 0,005		
Copper Corrosion 3H 50 °C*		ASTM D-130-12	1a	Class 1		
Existent Gums (washed)*	mg/100ml	ASTM D-381-04	<1	max 5		
Total contamination*	mg/Kg	EN ISO 12662:2014	<6	-		

The test results shown on this report affect only to the samples received in this laboratory, and not necessarily to the whole from which these samples were drawn.


Precision parameters apply in the evaluation of the test results specified above. Please also refer to ASTM D3244 (Except for RFG), IP 367 and appendix E of IP standard methods for analysis and testing in respect to the utilization of test data to determine conformance with the specifications.

The samples will be kept for a period of three months.

<sup>1</sup> Specifications: GASOLINAS SGC/SGA/SGP OPS REVISION 7 Fecha 28/04/15

Tests marked with (\*) are not included in the scope of the accreditation. Estimated uncertainties for each method are available upon request.

Date of Report: 19/12/2018  
Name/s: José Manuel Pérez  
Signature/s:





Algeciras Laboratory

Pol. Ind. Las Marismas III, C/ Océano Pacífico S/N  
Telephone: +34 956 92 42 75 E-mail: alg.lab@amspecgroup.com  
CIF : B72083769

ANALYTICAL REPORT - Revision 1

Job Number: 896  
O/ Ref: SP1812-003  
Y/ Ref: T1218212 - B/T MARVEA  
Grade: GASOLINE 95  
Origin: TERMINALES CANARIAS, TENERIFE  
Label: AMSPEC  
Identification: SHORE TANK 212  
Description: SHORE TANK COMPOSITE

Date of reception: 19th/12/2018  
Date Analysis started: 19th/12/2018  
Date Analysis completed: 20th/12/2018  
Sample Package: 3 X 1L CAN  
Sampling date: 11/12/18  
Seal Nº: N/A

Parameter	Units	Method	Result	Limit	Note
Density at 15°C	g/ml	ISO 12185:1996/Cor.1:2001(E)	0,7237		
DVPE	Kpa	EN ISO 13016-1	65,0		
Distillation		ASTM D86 - 16a			
Evap at 70°C	%Vol		38,0		
Evap at 100°C	%Vol		68,0		
Evap at 150°C	%Vol		95,2		
FBP	°C		170,6		
Residue	%Vol		1,0		
Sulphur	mg/Kg	EN ISO 20846:2011	9,3		
Lead Content	g/L	ASTM D 3237 - 17	< 0,0020		
Copper corrosion, 3h 50°C	Class 1	ASTM D130 - 12	1a		
Existent Gums (Washed)	mg/100ml	ASTM D 381 -12(2017)	< 0,5		
Total Contamination	mg/Kg	EN ISO 12662:2014	< 12		

The test results shown on this report affect only to the samples received in this laboratory, and not necessarily to the whole from which these samples were drawn.  
Precision parameters apply in the evaluation of the test results specified above. Please also refer to ASTM D3244 (Except for RFG), IP 367 and appendix E of IP standard methods for analysis and testing in respect to the utilization of test data to determine conformance with the specifications.  
The samples will be kept for a period of three months.

"This Analytical Report 895 - Revision 1, cancel and replace the analytical report 895".

Date of Report 20/12/2018  
Name/s Álvaro Bassi  
Signature/s Chief Analyst

AmSpec Iberia S.L.  
C/Alameda Pacífico s/n  
Polígono Industrial de Las Marismas  
11379 Las Marismas (Cádiz, Spain)

Authorized by Ari Rojas Gracia  
Laboratory Manager

# Inspectorate Española, S.A.

(Unipersonal)

Laboratorio de análisis - Huelva

Feligoso Industrial Nuevo Puerto 541.

Folces de la Frontera (HUELVA)

Tel.: 959 369 333 E-Mail: huelva.lab@inspectorate.es

C.I.F.: A 28633600



## ANALYTICAL REPORT

Job No: 18094-2 (Rev.1)  
o/Ref: ESODCJ18006199  
Y/Ref:

Date of reception: 27/12/2018  
Date Analysis started: 28/12/2018  
Date Analysis completed: 28/12/2018

Grade: Gasoline 95  
Origin: Terminales Canarias Tenerife  
Label: Terminales Canarias Tenerife  
Id: HISTRIA AZURE  
SHORE TANK 211 AFTER DISCHARGE - T1318211

Sample Package: 1x1L can  
Sampling date: 19/12/2018  
Seal N°: #172461

Test	Units	Method	Results	Specifications <sup>1</sup>	U=R/v2	Notes*
Density at 15 °C	Kg/m3	ASTM D-4052-2018	740,0	720-775	±1,6	
DVPE*	KPa	EN ISO 13016-1:2008	66,8	50-80		
Distillation <sup>4</sup>						
Evap at 70°C	%vol	ASTM D-86-17	33,6	22-56		
Evap at 100°C	%vol	ASTM D-86-17	62,5	46-74		
Evap at 150°C	%vol	ASTM D-86-17	94,8	min 75		
FBP	°C	ASTM D-86-17	172,2	max 210		
Residue	%vol	ASTM D-86-17	1,0	max 2,0		
Sulphur <sup>4</sup>	mg/Kg	EN-ISO-20846:2011	6,9	max 10,0		
Lead content <sup>4</sup>	g/L	ASTM D-3237-12	<0,0025	max 0,005		
Copper Corrosion 3H 50 °C <sup>4</sup>		ASTM D-130-12	1a	Class 1		
Existent Gums (washed)*	mg/100ml	ASTM D-381-04	<1	max 5		
Total contamination*	mg/Kg	EN ISO 12662:2014	<6	-		

The test results shown on this report affect only to the samples received in this laboratory, and not necessarily to the whole from which these samples were drawn.

Precision parameters apply in the evaluation of the test results specified above. Please also refer to ASTM D3244 (Except for RFG), IP 367 and appendix E of IP standard methods for analysis and testing in respect to the utilization of test data to determine conformance with the specifications.


"This Analytical Report 18094-2 (Rev.1) cancels and replaces the Analytical Report 18094-2."

The samples will be kept for a period of three months.

<sup>1</sup> Specifications: GASOLINAS SGC/SGA/SGP OPS REVISION 7 Fecha 28/04/15

Tests marked with (\*) are not included in the scope of the accreditation. Estimated uncertainties for each method are available upon request.

Date of Report 30/12/2018  
Name/s José Manuel Pérez  
Signature/s





**Inspectorate Española, S.A.**  
(Unipersonal)

Laboratorio de análisis - Huelva  
Polígono Industrial Nuevo Puerto S/A.  
Palos de la Frontera (HUELVA)  
Tel. : 959 269 335 E-Mail : huelva.lab@inspectorate.es  
C.I.F. : A 28633400



**ANALYTICAL REPORT**

Job No: 17896-4  
o/Ref : ESONVJ18005763  
Y/Ref :

Date of reception: 22/11/2018  
Date Analysis started: 22/11/2018  
Date Analysis completed: 22/11/2018

Grade: Gasoline 95  
Origin: Terminales Canarias Tenerife  
Label: Terminales Canarias Tenerife  
Id: HISTRIA GIADA

Sample Package: 1x1L can  
Sampling date: 18/11/2018  
Seal N°: #56933

SHORE TANK 311 AFTER DISCHARGE - T1218311

Test	Units	Method	Results	Specifications <sup>1</sup>	U=R/V2	Notes*
Density at 15 °C	Kg/m3	ASTM D-4052-2018	746,7	720-775	±1,5	
DVPE*	KPa	EN ISO 13016-1:2008	69,7	50-80		
Distillation*						
Evap at 70°C	%vol	ASTM D-86-17	33,2	22-56		
Evap at 100°C	%vol	ASTM D-86-17	60,8	46-74		
Evap at 150°C	%vol	ASTM D-86-17	94,8	min 75		
FBP	°C	ASTM D-86-17	172,5	max 210		
Residue	%vol	ASTM D-86-17	1,0	max 2,0		
Sulphur*	mg/Kg	EN-ISO-20846:2011	7,8	max 10,0		
Lead content*	g/L	ASTM D-3237-12	<0,0025	max 0,005		
Copper Corrosion 3H 50 °C*		ASTM D-130-12	1a	Class 1		
Existent Gums (washed)*	mg/100ml	ASTM D-381-04	<1	max 5		
Total contamination*	mg/Kg	EN ISO 12662:2014	<6			

The test results shown on this report affect only to the samples received in this laboratory, and not necessarily to the whole from which these samples were drawn.

Precision parameters apply in the evaluation of the test results specified above. Please also refer to ASTM D3244 (Except for RFG), IP 367 and appendix E of IP standard methods for analysis and testing in respect to the utilization of test data to determine conformance with the specifications.

The samples will be kept for a period of three months.

<sup>1</sup> Specifications: GASOLINAS SGC/SGA/SGP OPS REVISION 7 Fecha 23/04/15

Tests marked with (\*) are not included in the scope of the accreditation. Estimated uncertainties for each method are available upon request.



Date of Report 22/11/2018  
Name/s Marcos Carabias  
Signature/s



Chief Analyst

# Inspectorate Española, S.A.

(Unipersonal)

Laboratorio de análisis - Huelva

Polígono Industrial Nuevo Puerto 5/11

Pólos de la Frontera (HUELVA)

Tel.: 959 369 335 E-Mail: huelva.labs@inspectorals.es

C.I.F.: A 28433820



## ANALYTICAL REPORT

Job No: 18094-4 (Rev.1)  
o/Ref: ESODCJ18006199  
Y/Ref:

Date of reception: 27/12/2018  
Date Analysis started: 28/12/2018  
Date Analysis completed: 28/12/2018

Grade: Gasoline 98  
Origin: Terminales Canarias Tenerife  
Label: Terminales Canarias Tenerife  
Id: HISTRIA AZURE  
SHORE TANK 311 AFTER DISCHARGE - T1318311

Sample Package: 1x1L can  
Sampling date: 19/12/2018  
Seal N°: #172463

Test	Units	Method	Results	Specifications <sup>1</sup>	U=R/v2	Notes*
Density at 15 °C	Kg/m3	ASTM D-4052-2018	747,0	720-775	±1,6	
DVPE*	KPa	EN ISO 13016-1:2008	70,8	50-80		
Distillation*						
Evap at 70°C	%vol	ASTM D-86-17	32,5	22-56		
Evap at 100°C	%vol	ASTM D-86-17	60,6	46-74		
Evap at 150°C	%vol	ASTM D-86-17	94,6	min 75		
FBP	°C	ASTM D-86-17	172,9	max 210		
Residue	%vol	ASTM D-86-17	1,0	max 2,0		
Sulphur*	mg/Kg	EN-ISO-20846:2011	7,6	max 10,0		
Lead content*	g/L	ASTM D-3237-12	<0,0025	max 0,005		
Copper Corrosion 3H 50 °C*		ASTM D-130-12	1a	Class 1		
Existent Gums (washed)*	mg/100ml	ASTM D-381-04	<1	max 5		
Total contamination*	mg/Kg	EN ISO 12662:2014	<6	-		

The test results shown on this report affect only to the samples received in this laboratory, and not necessarily to the whole from which these samples were drawn.

Precision parameters apply in the evaluation of the test results specified above. Please also refer to ASTM D3244 (Excep for RFG), IP 367 and appendix E of IP standard methods for analysis and testing in respect to the utilization of test data to determine conformance with the specifications.

"This Analytical Report 18094-4 (Rev.1) cancels and replaces the Analytical Report 18094-4."

The samples will be kept for a period of three months.

<sup>1</sup> Specifications: GASOLINAS SGC/SGA/SGP OPS REVISION 7 Fecha 28/04/15

Tests marked with (\*) are not included in the scope of the accreditation. Estimated uncertainties for each method are available upon request.

Date of Report 30/12/2018  
Name/s José Manuel Pérez  
Signature/s

